




Display	M12S
Dimensions (mm)	Hx236 Wx317 Dx59
Weight	4Kg
Construction	Cast Aluminium
Power Input	120-240VAC ~50/60Hz 1.0A
Screen Size	12"
Maximum Resolution	800x600
Colours Displayed	262K 18bit
Pixel Pitch (mm)	0.307
Contrast Ratio	450:1
Viewing Angle (H/V)	140°/110°
Brightness	350 cd/m2
Video Input	Analog: 15 Pin D Sub

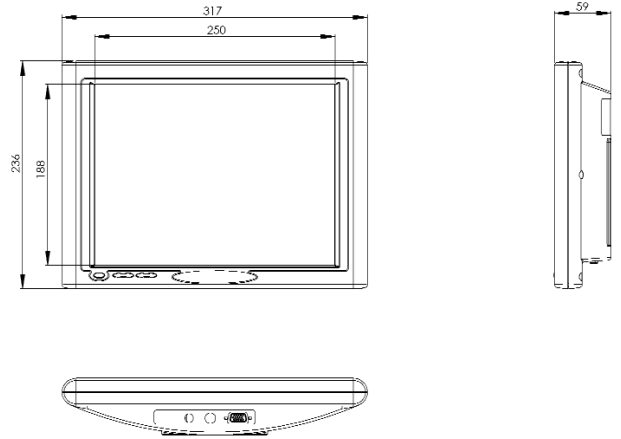

Display	M15X
Dimensions (mm)	Hx279 Wx390 Dx62
Weight	5Kg
Construction	Cast Aluminium
Power Input	120-240VAC ~50/60Hz 1.0A
Screen Size	15"
Maximum Resolution	1024x768
Colours Displayed	16.7M 32 bit
Pixel Pitch (mm)	0.297
Contrast Ratio	400:1
Viewing Angle (H/V)	160°/110°
Brightness	400 cd/m2
Video Input	Analog: 15 Pin D Sub

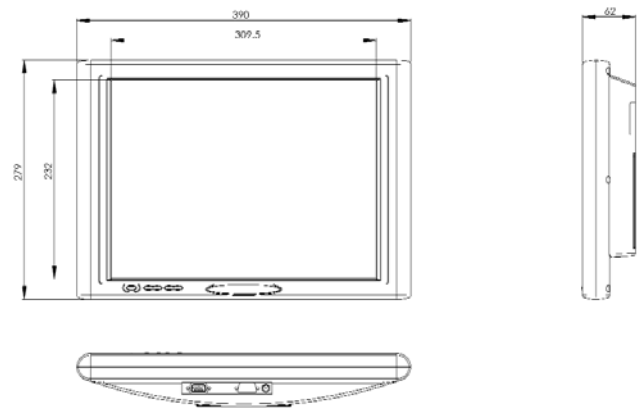

Display	M19S
Dimensions (mm)	Hx490 Wx370 Dx64
Weight	9Kg
Construction	1.2mm sheet steel
Power Input	120-240VAC ~50/60Hz 1.0A
Screen Size	19"
Maximum Resolution	1280 x 1024
Colours Displayed	16.7M 32 bit
Pixel Pitch (mm)	0.294
Contrast Ratio	800:1
Viewing Angle (H/V)	170°/170°
Brightness	350 cd/m2
Video Input	Digital: DVI., Analog: 15 Pin D Sub

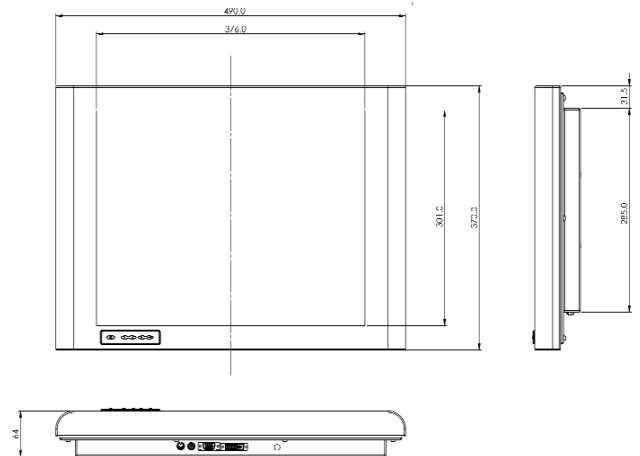

Touchscreen Options	ELO	Hampshire	3M Touch
Technology	Resistive	Resistive	Capacitive
Controller	ELO™ 2216 Combo Controller	Hampshire™ TShark™	MicroTouch™ EX II
Sensor	ELO™ Accutouch™ 5 Wire	ELO™ Accutouch™ 5 Wire	MicroTouch™ ClearTek™ II
Communication	RS232 or USB	RS232, USB or PS2	RS232
Touch Resolution	4096 x 4096	4096 x 4096	16k x 16k