









INDUSTRIAL 12" & 15" PANEL PC

- COMPACT AND ROBUST
- IP65 WATERPROOF FRONT PANEL
- THERMALLY REGULATED VENTILATION
- PROCESSOR: CELERON® M OR PENTIUM® M
- LCD TFT 12" RESOLUTION SVGA: 800 X 600
- LCD TFT 15" RESOLUTION XGA: 1024 X 768



OPTIONAL

- WIFI SOLUTION
- RESISTIVE TOUCH SCREEN

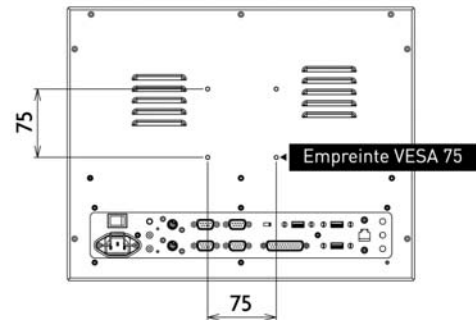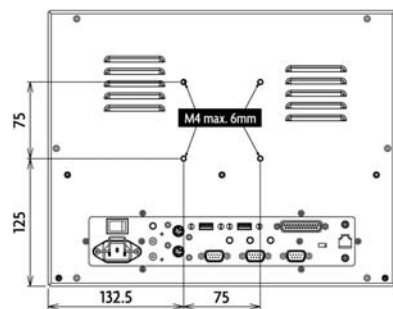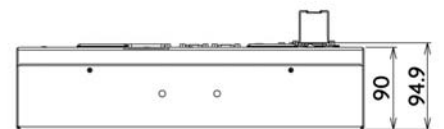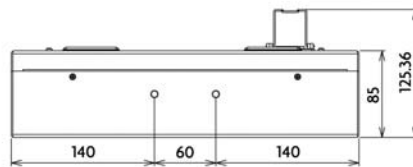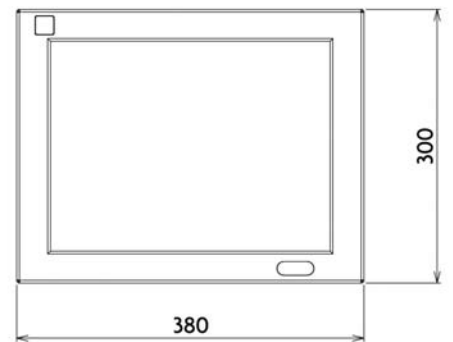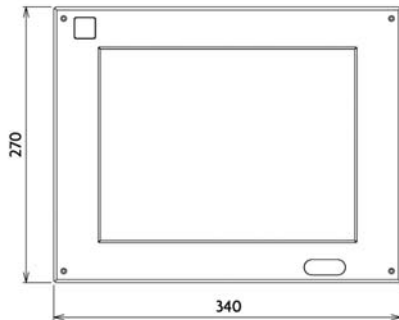

RDP

62 VICTORIA ROAD
VICTORIA INDUSTRIAL ESTATE
BURGESS HILL
WEST SUSSEX
RH15 9LR

T: 01444 245123

F: 01444 245124

E: SALES@RDPDISPLAYS.COM

W: WWW.RDPDISPLAYS.COM

SPECIFICATIONS

• CHASSIS

Material	1.5mm treated metal sheet
Without Touch screen	Anti-reflective coating on screen
Protection	IP65 to front
Mounting	Desktop or wall mount options

• DISPLAY

Screen size	12"	15"
Active area	264 x 184 mm	304 x 228 mm
Resolution	800 x 600	1024 x 768
Colours	262,144	16.2 Million
Pixel pitch	0.30 mm	0.267 mm
Brightness	450cd/m ²	300cd/m ²
Contrast ratio	500:1	300:1
Viewing angle	140° / 120°	140° / 120°

• CPU

CELERON® M or PENTIUM® M

• HARD DISK DRIVE

1 X 2.5"

• I/O CONNECTIONS (ON BACK PANEL)

Screen size	12"	15"
	2 x USB	3 x USB
	3 x RS232	4 x RS232
	1 x 10/100BaseT	1 x 10/100BaseT
	Mains plug (AC~)	Mains plug (AC~)

• CONTROLS (ON BACK PANEL)

ATX power switch
Reset button
LED for power
LED for HDD
Brightness control

• FAN SYSTEM

Fan system thermally regulated

• DIMENSIONS

	12"	15"
Width	340mm	380mm
Height	270mm	300mm
Depth	85mm	90mm
Weight	7Kg	7.5Kg

• OPTIONAL WIRELESS

Supported networks	802.11 a/b/g
---------------------------	--------------

• POWER

Power Rating (AC~)	
Input / Frequency	85 to 265 VAC - 47 to 63 Hz
12VDC and 240VDC Input	10 to 30 VDC
Power consumption	75w max.

• OPTIONAL TOUCH SCREEN

Technology	Resistive
Resistance	Main chemical products Treated against abrasion
Light transmission	75%
Drivers	MS Windows & Linux

• CERTIFICATIONS

EN60950
EN55022
EN55024 (EN50081/EN50082)
EN61000-4-2 - EN61000-4-4
EN61000-3-3 - EN61000-4-5
ENV50140 (EN61000-4-3)
ENV50141 (EN61000-4-6)
EN61000-3-2
EN61000-4-11

• ENVIRONMENTAL

Operational temperature	0 - 35°C
Storage temperature	-20 - 60°C
Humidity without condensation	5 - 95%

• CABLES

Cables supplied	1 x 1.8m mains cable
------------------------	----------------------

• WARRANTY

2 Years Parts & labour	Return to base as standard Optional onsite available
-----------------------------------	---

ORDERING INFORMATION

12" Panel PC in metal case - 230VAC

PPC 12M - Non touch 12"
PPC 12MRT - Resistive touch 12"

15" Panel PC in metal case - 230VAC

PPC 15M - Non touch 15"
PPC 15MRT - Resistive touch 15"

Mounting Options

PPC12 DM Table base support (stainless steel)
PPC12 WM Ceiling / Wall mount support (stainless steel)

PPC15 DM Table base support (stainless steel)
PPC15 WM Ceiling / Wall mount support (stainless steel)

Please call for additional information about accessories & options.



01444 245123



sales@rdpdisplays.com