








## INDUSTRIAL 19" SLIMLINE PANEL PC

- COMPACT AND ROBUST
- IP65 WATERPROOF FRONT PANEL
- THERMALLY REGULATED VENTILATION
- PROCESSOR: CELERON® M OR PENTIUM® M
- LCD TFT 19" RESOLUTION SXGA: 1280 X 1024

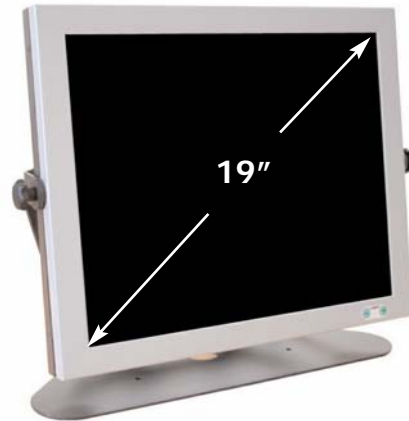

### OPTIONAL

- WIFI SOLUTION
- RESISTIVE TOUCH SCREEN

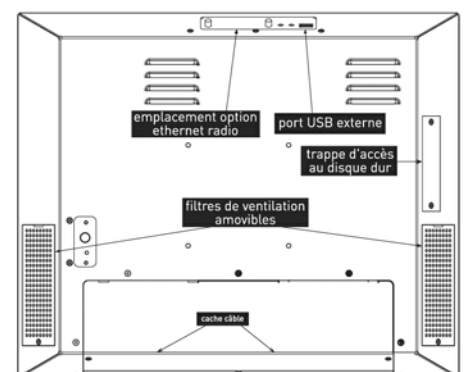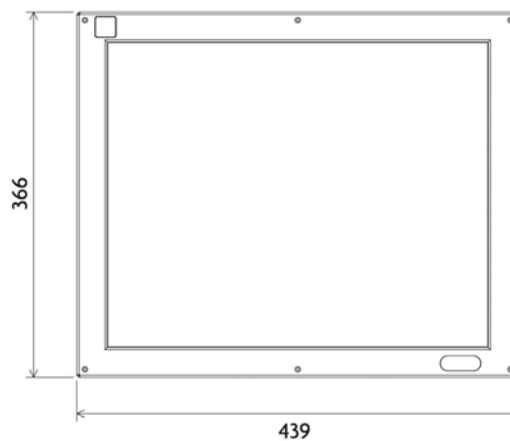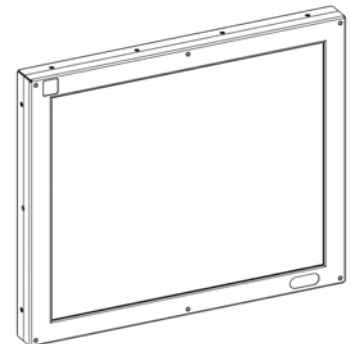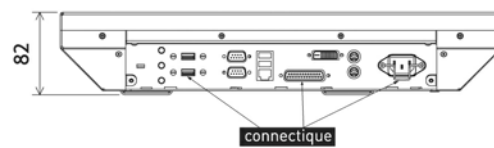

**RDP**

62 VICTORIA ROAD  
VICTORIA INDUSTRIAL ESTATE  
BURGESS HILL  
WEST SUSSEX  
RH15 9LR

T: 01444 245123

F: 01444 245124

E: SALES@RDPDISPLAYS.COM

W: WWW.RDPDISPLAYS.COM

# SPECIFICATIONS

## • CHASSIS

<b>Material</b>	1.5mm treated metal sheet
<b>Without Touch screen</b>	Anti-reflective coating on screen
<b>Protection</b>	IP65 to front
<b>Mounting</b>	Desktop or wall mount options

## • DISPLAY

<b>Screen size</b>	19"
<b>Active area</b>	376 x 301 mm
<b>Resolution</b>	1280 x 1024
<b>Colours</b>	16.7 Million
<b>Pixel pitch</b>	0.0294 mm
<b>Brightness</b>	250cd/m <sup>2</sup>
<b>Contrast ratio</b>	500:1
<b>Viewing angle</b>	160° / 160°

## • CPU

CELERON® M or PENTIUM® M

## • HARD DISK DRIVE

1 X 2.5"

## • I/O CONNECTIONS (ON BACK PANEL)

4 x USB  
2 x RS232  
1 x 10/100BaseT  
Mains plug (AC~)

## • CONTROLS (ON BACK PANEL)

ATX power switch  
Reset button  
LED for power  
LED for HDD  
Brightness control

## • FAN SYSTEM

Fan system thermally regulated

## • DIMENSIONS

<b>Width</b>	439mm
<b>Height</b>	366mm
<b>Depth</b>	82mm
<b>Weight</b>	9.5Kg

## • OPTIONAL WIRELESS

<b>Supported networks</b>	802.11 a/b/g
---------------------------	--------------

## • POWER

<b>Power Rating (AC~)</b>	
<b>Input / Frequency</b>	85 to 265 VAC - 47 to 63 Hz
<b>Power consumption</b>	90w max.

## • OPTIONAL TOUCH SCREEN

<b>Technology</b>	Resistive
<b>Resistance</b>	Main chemical products Treated against abrasion
<b>Light transmission</b>	75%
<b>Drivers</b>	MS Windows & Linux

## • CERTIFICATIONS

EN60950  
EN55022  
EN55024 (EN50081/EN50082)  
EN61000-4-2 - EN61000-4-4  
EN61000-3-3 - EN61000-4-5  
ENV50140 (EN61000-4-3)  
ENV50141 (EN61000-4-6)  
EN61000-3-2  
EN61000-4-11

## • ENVIRONMENTAL

<b>Operational temperature</b>	0 - 45°C
<b>Storage temperature</b>	-20 - 60°C
<b>Humidity without condensation</b>	5 - 95%

## • CABLES

<b>Cables supplied</b>	1 x 1.8m mains cable
------------------------	----------------------

## • WARRANTY

<b>2 Years Parts &amp; labour</b>	Return to base as standard Optional onsite available
-----------------------------------	---

## ORDERING INFORMATION

19" Slimline Panel PC in metal case - 230VAC

PPC 19M - Non touch 17"

PPC 19MRT - Resistive touch 17"

### Mounting Options

PPC19 DM Table base support (stainless steel)

PPC19 WM Ceiling / Wall mount support (stainless steel)

Please call for additional information about accessories & options.



01444 245123



sales@rdpdisplays.com