



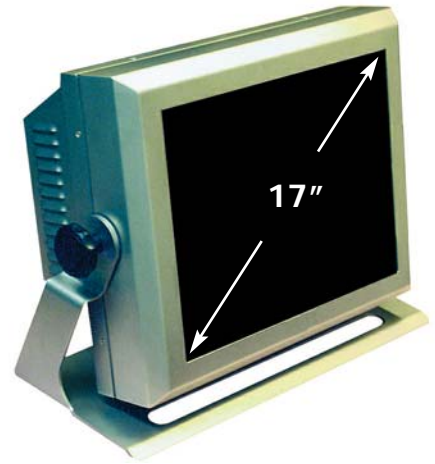







# STAINLESS STEEL, IP65 SEALED 15" & 17" PANEL PC

- COMPACT AND ROBUST
- IP65 WATERPROOF PANEL PC IN STAINLESS STEEL 316L CASING
- COOLED BY AN AIR-TO-AIR HEAT EXCHANGER
- PROCESSOR: CELERON® M OR PENTIUM® M
- LCD TFT 15" RESOLUTION XGA: 1024 X 768
- LCD TFT 17" RESOLUTION SXGA: 1280 X 1024

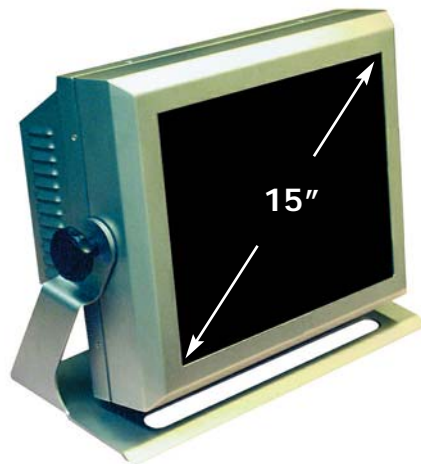

### OPTIONAL

- WIFI SOLUTION
- RESISTIVE TOUCH SCREEN

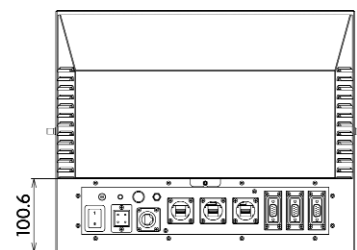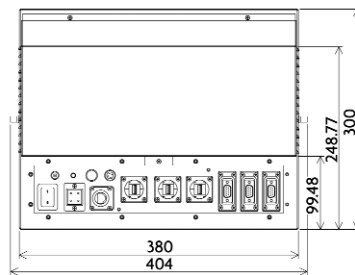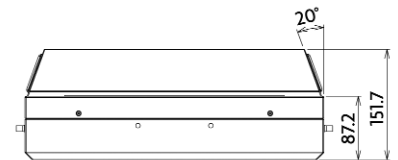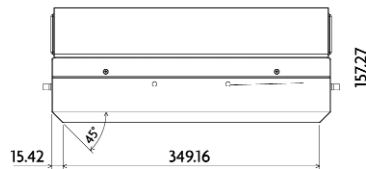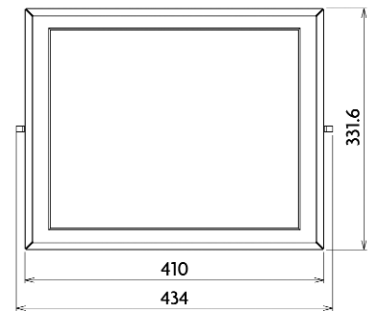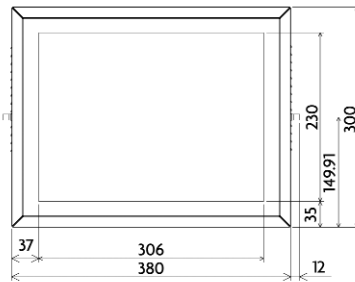

## RDP

62 VICTORIA ROAD  
 VICTORIA INDUSTRIAL ESTATE  
 BURGESS HILL  
 WEST SUSSEX  
 RH15 9LR

T: 01444 245123  
 F: 01444 245124  
 E: SALES@RDPDISPLAYS.COM  
 W: WWW.RDPDISPLAYS.COM



Fully enclosed stainless steel casing



Air-to-air exchanger at rear of unit



Waterproof IP65 connections

# SPECIFICATIONS

## • CHASSIS

<b>Material</b>	Stainless steel 316L
<b>Without Touch screen</b>	Anti-reflective coating on screen
<b>Protection</b>	IP65 6 Sides
<b>Mounting</b>	Desktop or wall mount options

## • DISPLAY

<b>Screen size</b>	<b>15"</b>	<b>17"</b>
<b>Active area</b>	304 x 228 mm	337 x 270 mm
<b>Resolution</b>	1024 x 768	1280 x 1024
<b>Colours</b>	16.2 Million	16.2 Million
<b>Pixel pitch</b>	0.297 mm	0.264 mm
<b>Brightness</b>	300cd/m <sup>2</sup>	250cd/m <sup>2</sup>
<b>Contrast ratio</b>	300:1	500:1
<b>Viewing angle</b>	140° / 120°	150° / 120°

## • CPU

CELERON® M or PENTIUM® M

## • HARD DISK DRIVE

1 X 2.5"

## • I/O CONNECTIONS (ON BACK PANEL)

3 x USB  
3 x RS232  
1 x Ethernet 10/100 Mbps (RJ45)  
Mains plug (AC~)

## • CONTROLS (ON BACK PANEL)

ATX power switch  
Reset button  
LED for power  
LED for HDD  
Brightness control

## • FAN SYSTEM

Cooled by an air-to-air exchanger

## • DIMENSIONS

<b>Width</b>	<b>15"</b>	<b>17"</b>
<b>Height</b>	380mm	410mm
<b>Depth</b>	300mm	332mm
<b>Weight</b>	157.3mm	152mm
	10.5Kg	12Kg

## • OPTIONAL WIRELESS

**Supported networks** 802.11 a/b/g

## • POWER

**Power Rating (AC~)**  
**Input / Frequency** 85 to 265 VAC - 47 to 63 Hz  
**Power consumption** 85w max.

## • OPTIONAL TOUCH SCREEN

<b>Technology</b>	Resistive
<b>Resistance</b>	Main chemical products Treated against abrasion
<b>Light transmission</b>	75%
<b>Drivers</b>	MS Windows & Linux

## • CERTIFICATIONS

EN60950  
EN55022  
EN55024 (EN50081/EN50082)  
EN61000-4-2 - EN61000-4-4  
EN61000-3-3 - EN61000-4-5  
ENV50140 (EN61000-4-3)  
ENV50141 (EN61000-4-6)  
EN61000-3-2  
EN61000-4-11

## • ENVIRONMENTAL

<b>Operational temperature</b>	0 - 35°C
<b>Storage temperature</b>	-20 - 60°C
<b>Humidity without condensation</b>	5 - 95%

## • CABLES

<b>Waterproof cables supplied (PC end connections only)</b>	1 x 2M mains cable 1 x 2M RS232 cable 1 x 2M USB cable 1 x 2M RJ45 cable
---	---

## • WARRANTY

<b>2 Years Parts &amp; labour</b>	Return to base as standard Optional onsite available
-----------------------------------	---

## ORDERING INFORMATION

**Waterproof 15" Panel PC in stainless steel case - 230VAC**

**SS PPC 15M** - Non touch 15"  
**SS PPC 15MRT** - Resistive touch 15"

**Waterproof 17" Panel PC in stainless steel case - 230VAC**

**SS PPC 17M** - Non touch 17"  
**SS PPC 17MRT** - Resistive touch 17"

### Mounting Options

**SS PPC DM** Table base support (stainless steel)  
**SS PPC WM** Ceiling / Wall mount support (stainless steel)

Please call for additional information about accessories & options.



01444 245123



sales@rdpdisplays.com